

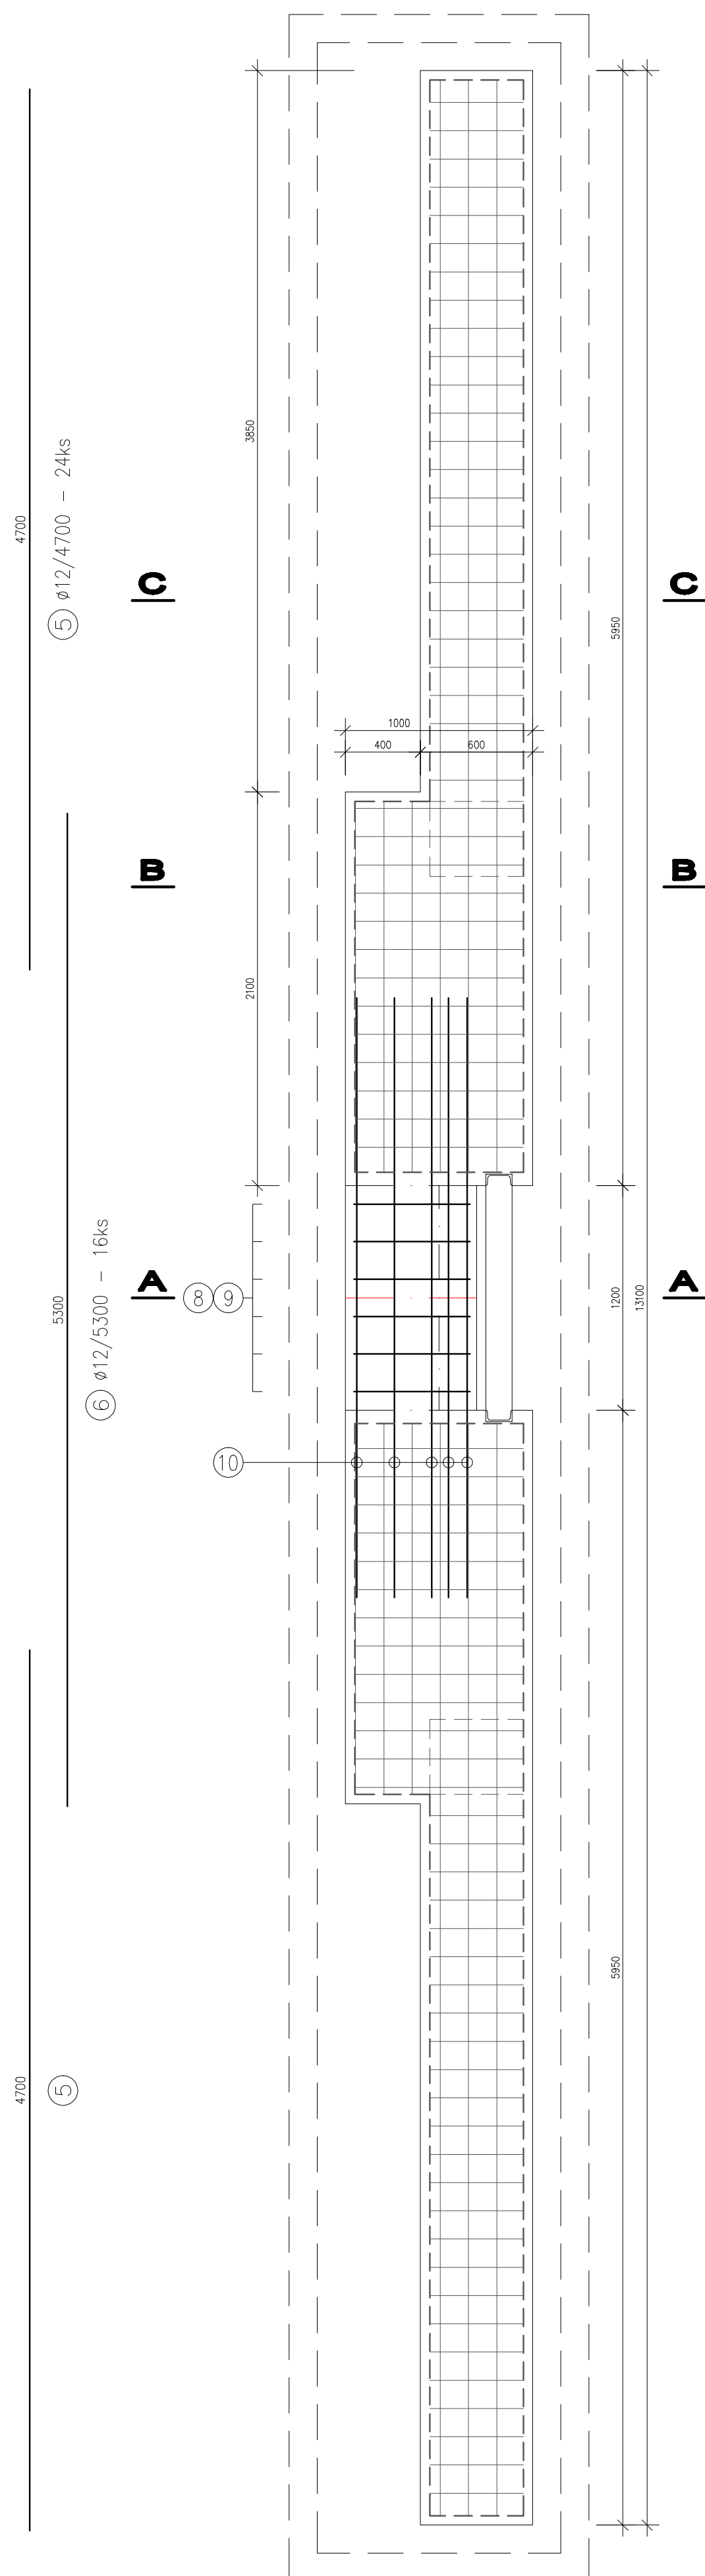



A horizontal number line with four tick marks. Above the second and third tick marks are circles containing the numbers 5 and 6, respectively.

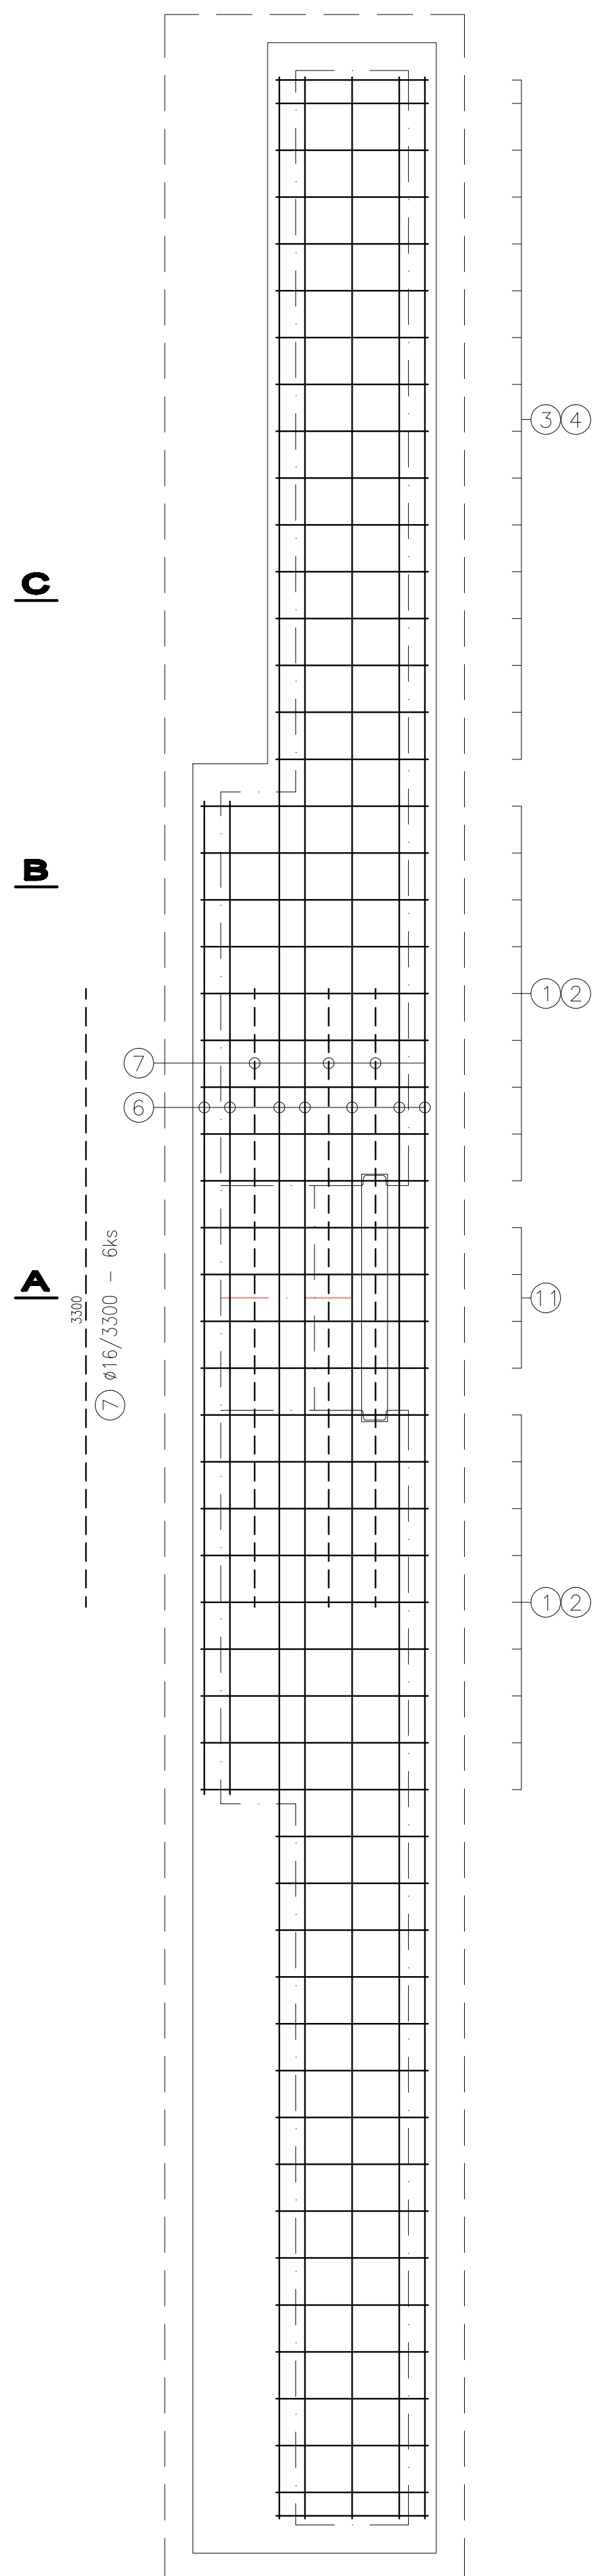




Technical drawing of a wall section showing a window frame and a door frame. The drawing is labeled 'B' and 'C'. Dimensions are given in millimeters: 500, 1500, 2900, 1400, and 2900. Callouts 8, 9, and 10 point to specific parts of the window frame.

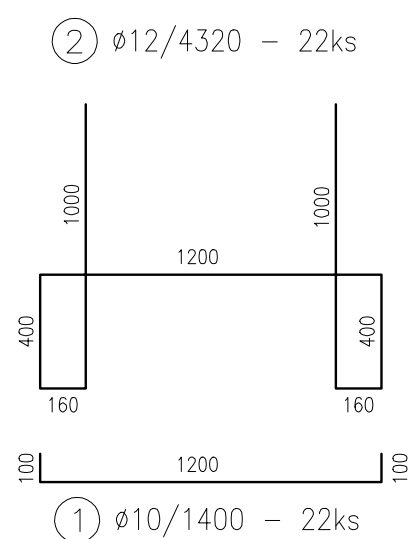

Technical drawing of a rectangular table. The overall dimensions are 2900 (height) by 900 (width). The drawing shows a top-down view with a dashed line indicating the inner frame. Labels include S2 at the top center, KARI 5x150/5 on the right side, and S1 at the bottom right corner. Dimensions 300, 900, and 2900 are marked with arrows.

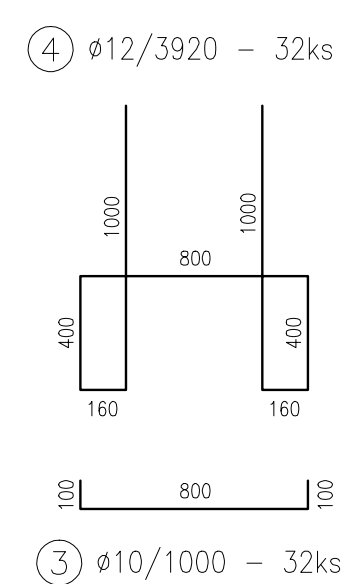

Technical drawing of a rectangular stone structure. The drawing shows a side elevation and a top view. The side elevation is a rectangle with a height of 2000 and a width of 500. The top view is a rectangle with a width of 500 and a height of 8x150. The drawing includes labels S1, S2, and S7. S1 is located on the right side of the side elevation, S2 is located on the top edge of the side elevation, and S7 is located on the top edge of the top view. The drawing also includes dimensions 2000, 500, 8x150, and 500.

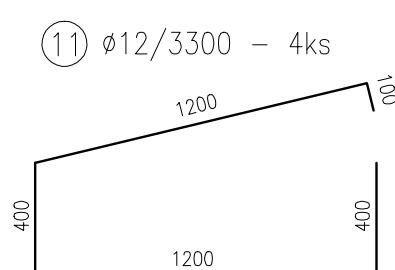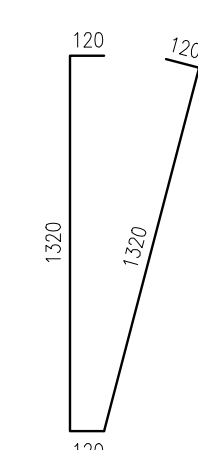




Č. POL.	PRŮMĚR	DĚLKA (m)	POČET (ks)	DL.CELK. (m)	HMOTNOST (kg/m)	HMOTNOST CELK. (kg)
1	ø10	1,40	18	25,20	0,62	15,62
2	ø12	4,32	18	77,76	0,89	69,21
3	ø10	1,00	32	32,00	0,62	19,84
4	ø12	3,92	32	125,44	0,89	111,84
5	ø12	4,70	24	112,80	0,89	100,39
6	ø12	5,30	16	84,80	0,89	75,47
7	ø16	3,30	6	19,80	1,58	31,28
8	ø10	1,58	6	9,48	0,62	5,88
9	ø12	3,00	6	18,00	0,89	16,02
10	ø12	3,20	22	70,40	0,89	62,66
11	ø12	3,30	4	13,20	0,89	11,75

STĚNY ... 92,07m<sup>2</sup> = 497,18kg

STĚNY ... 18,35m<sup>2</sup> = 38,35kg

**Ø16 = 31,28**

KONSTRUKČNÍ BETON C25/30 XC4, XF3  
PODKLADNÍ, VÝPLŇOVÝ BETON C20/25 XC2, XA1  
OCEL B500B, KRYTÍ VÝZTUŽE min. 35mm

Zodpovědný pracovník	Vypracoval		 <b>AQUA CENTRUM</b> Břeclav s.r.o.
Ing. Milan Bartolíš	Ing. Jan Vondráček		Kapavský 27, 690 06 Břeclav IČO 60710063, DIČ CZ62710663 tel.: 519 333 689, email: <a href="mailto:info@aqw.cz">info@aqw.cz</a>
Investor: Povodí Moravy, s.p., Dřevařská 11, 60200 Brno	Asoc: <b>Mlýnský náhon, Horní Moštěnice optimalizace toku</b>		
DOKUMENTACE PRO PROVÁDĚNÍ STAVBY		Formát	Datum
		Číslo stavby	červen 2020
Příloha: SO03 – STAVIDLOVÝ OBJEKT STAVIDLO – VÝKRES VÝTUŽE	Mařba 1:25	Číslo přílohy	<b>D.1.1.b.10</b>