


M 1:25, 1:50

Vzorový řez základovou patkou, M 1:25

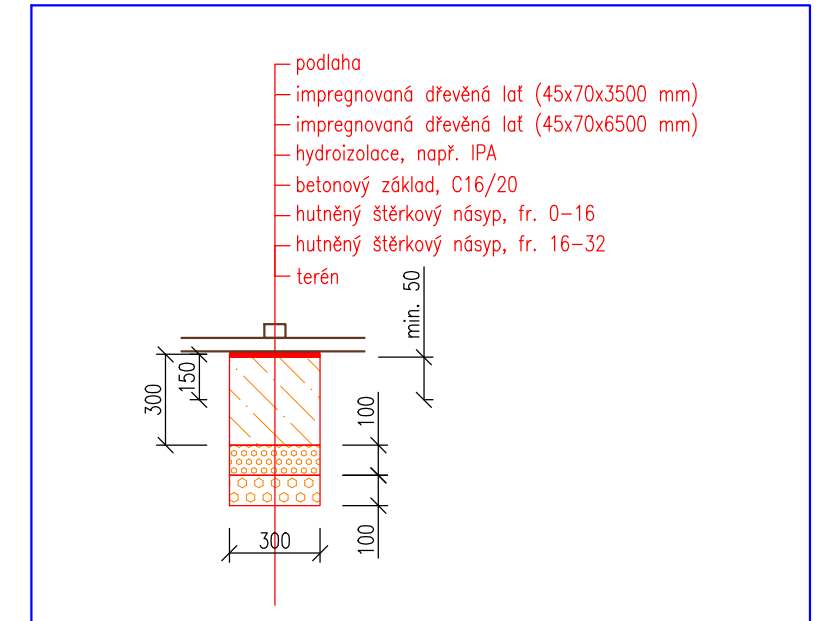

Technical drawing of a reinforced concrete slab and its cross-sections.

The main drawing shows a plan view of a rectangular slab with a grid of reinforcement bars. The grid consists of 10 vertical bars and 6 horizontal bars. The dimensions are indicated as 500 mm between vertical bars and 300 mm between horizontal bars. The total width of the slab is 4000 mm (8 intervals of 500 mm) and the total length is 1800 mm (6 intervals of 300 mm). The reinforcement bars are shown as red lines with diagonal hatching.

Two cross-sections are shown:

- Section 1-1 (top right):** Shows the slab thickness of 100 mm. The reinforcement bars are shown as red lines with diagonal hatching. The distance between the top and bottom bars is 100 mm.
- Section 2-2 (bottom):** Shows the slab thickness of 100 mm. The reinforcement bars are shown as red lines with diagonal hatching. The distance between the top and bottom bars is 100 mm. The width of the slab is 70 mm.

		<h1>HG partner s.r.o.</h1> <p>Smetanova 200, 250 82 Úvaly  <a href="http://www.hgpartner.cz">www.hgpartner.cz</a></p> <p>Telefon: 246 082 015  e-mail: <a href="mailto:hgp@hgpartner.cz">hgp@hgpartner.cz</a></p>		Paré č.:	
Investor: Povodí Ohře, státní podnik, Bezručova 4219, 430 03 Chomutov				Datum: 06/2023	
Odpovědný projektant: Ing. Jaroslav Vrzák				Č. zakázky: H-22/036	
Vpracoval: Ing. Adéla Jůzová				Změna: -	
Akce: OPŠ 07/2021 Ostružník - Děčín - Přípeř				Stupeň: DSP	
Název části: DOKUMENTACE OBJEKTŮ				Část: D	
Příloha: Obnova kůlny u č.p. 39				Měřítka: 1:25, 1:50 Č. přílohy: D.13	